

# Deep Well Packer Adapter

For use with Jet Pumps

## WELL HEAD FITTINGS



■ **AWJ2 – 2" Packer Adapter:** Well casing adapter for series J+, JRD, and HSJ jet pumps.



■ **AW40\*:** Well casing adapter for series J+, JRD, and HSJ jet pumps.



■ **AWJB2 – 2" Packer Adapter:** Well casing adapter for series JB jet pumps.



■ **AWD2 or AWD3:** Well casing adapter for series SJ and VJ jet pumps.



■ **AWCJ3 – 3" Packer Adapter:** Well casing adapter for series J+ and HSJ.



■ **AW42\*\*:** Well casing adapter for series SJ and VJ jet pumps.

\*AW40 is used to comply with State of Michigan requirements for offset installations from 2" or 3" diameter wells.


\*\*AW42 can be used to comply with State of Michigan requirements for offset installations from 2" or 3" diameter wells.

AW42 cannot be used as well casing adapter for 3" diameter wells.

■ **SRPA:** Converts Goulds SJ to Sta-Rite® 2" packer.

## TYPICAL INSTALLATIONS


### Horizontal Jet Pumps

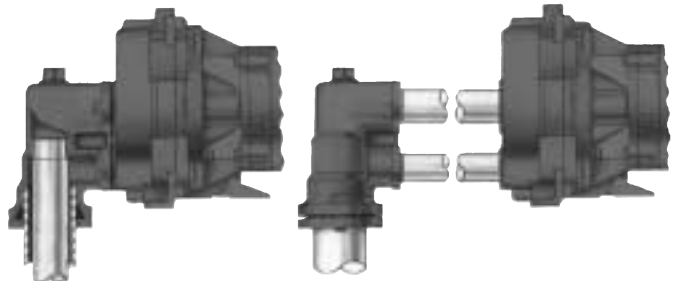

Over the Well

Offset

### Vertical Jet Pumps

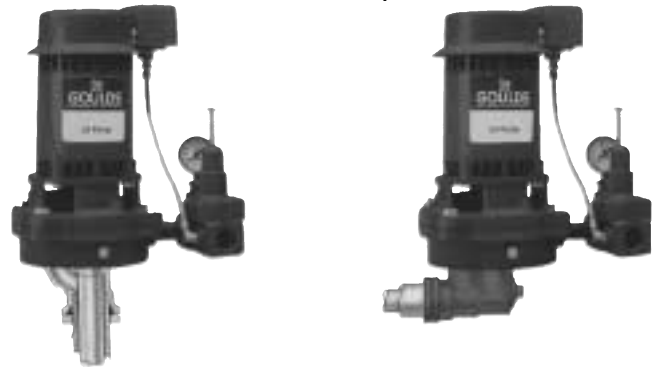

With AWD Adapter

**AW42 – Adapter** is used to comply with State of Michigan requirements for enclosed suction line. It can be used as an offset adapter for 2" wells instead of using a well casing tee.

Goulds Pumps and the ITT Engineered Blocks symbol are registered trademarks and tradenames of ITT Industries.