


FLOW RANGE: 10 -20 GPM

OUTLET SIZE: 1 1/4 " NPT

NOMINAL DIA. 4"

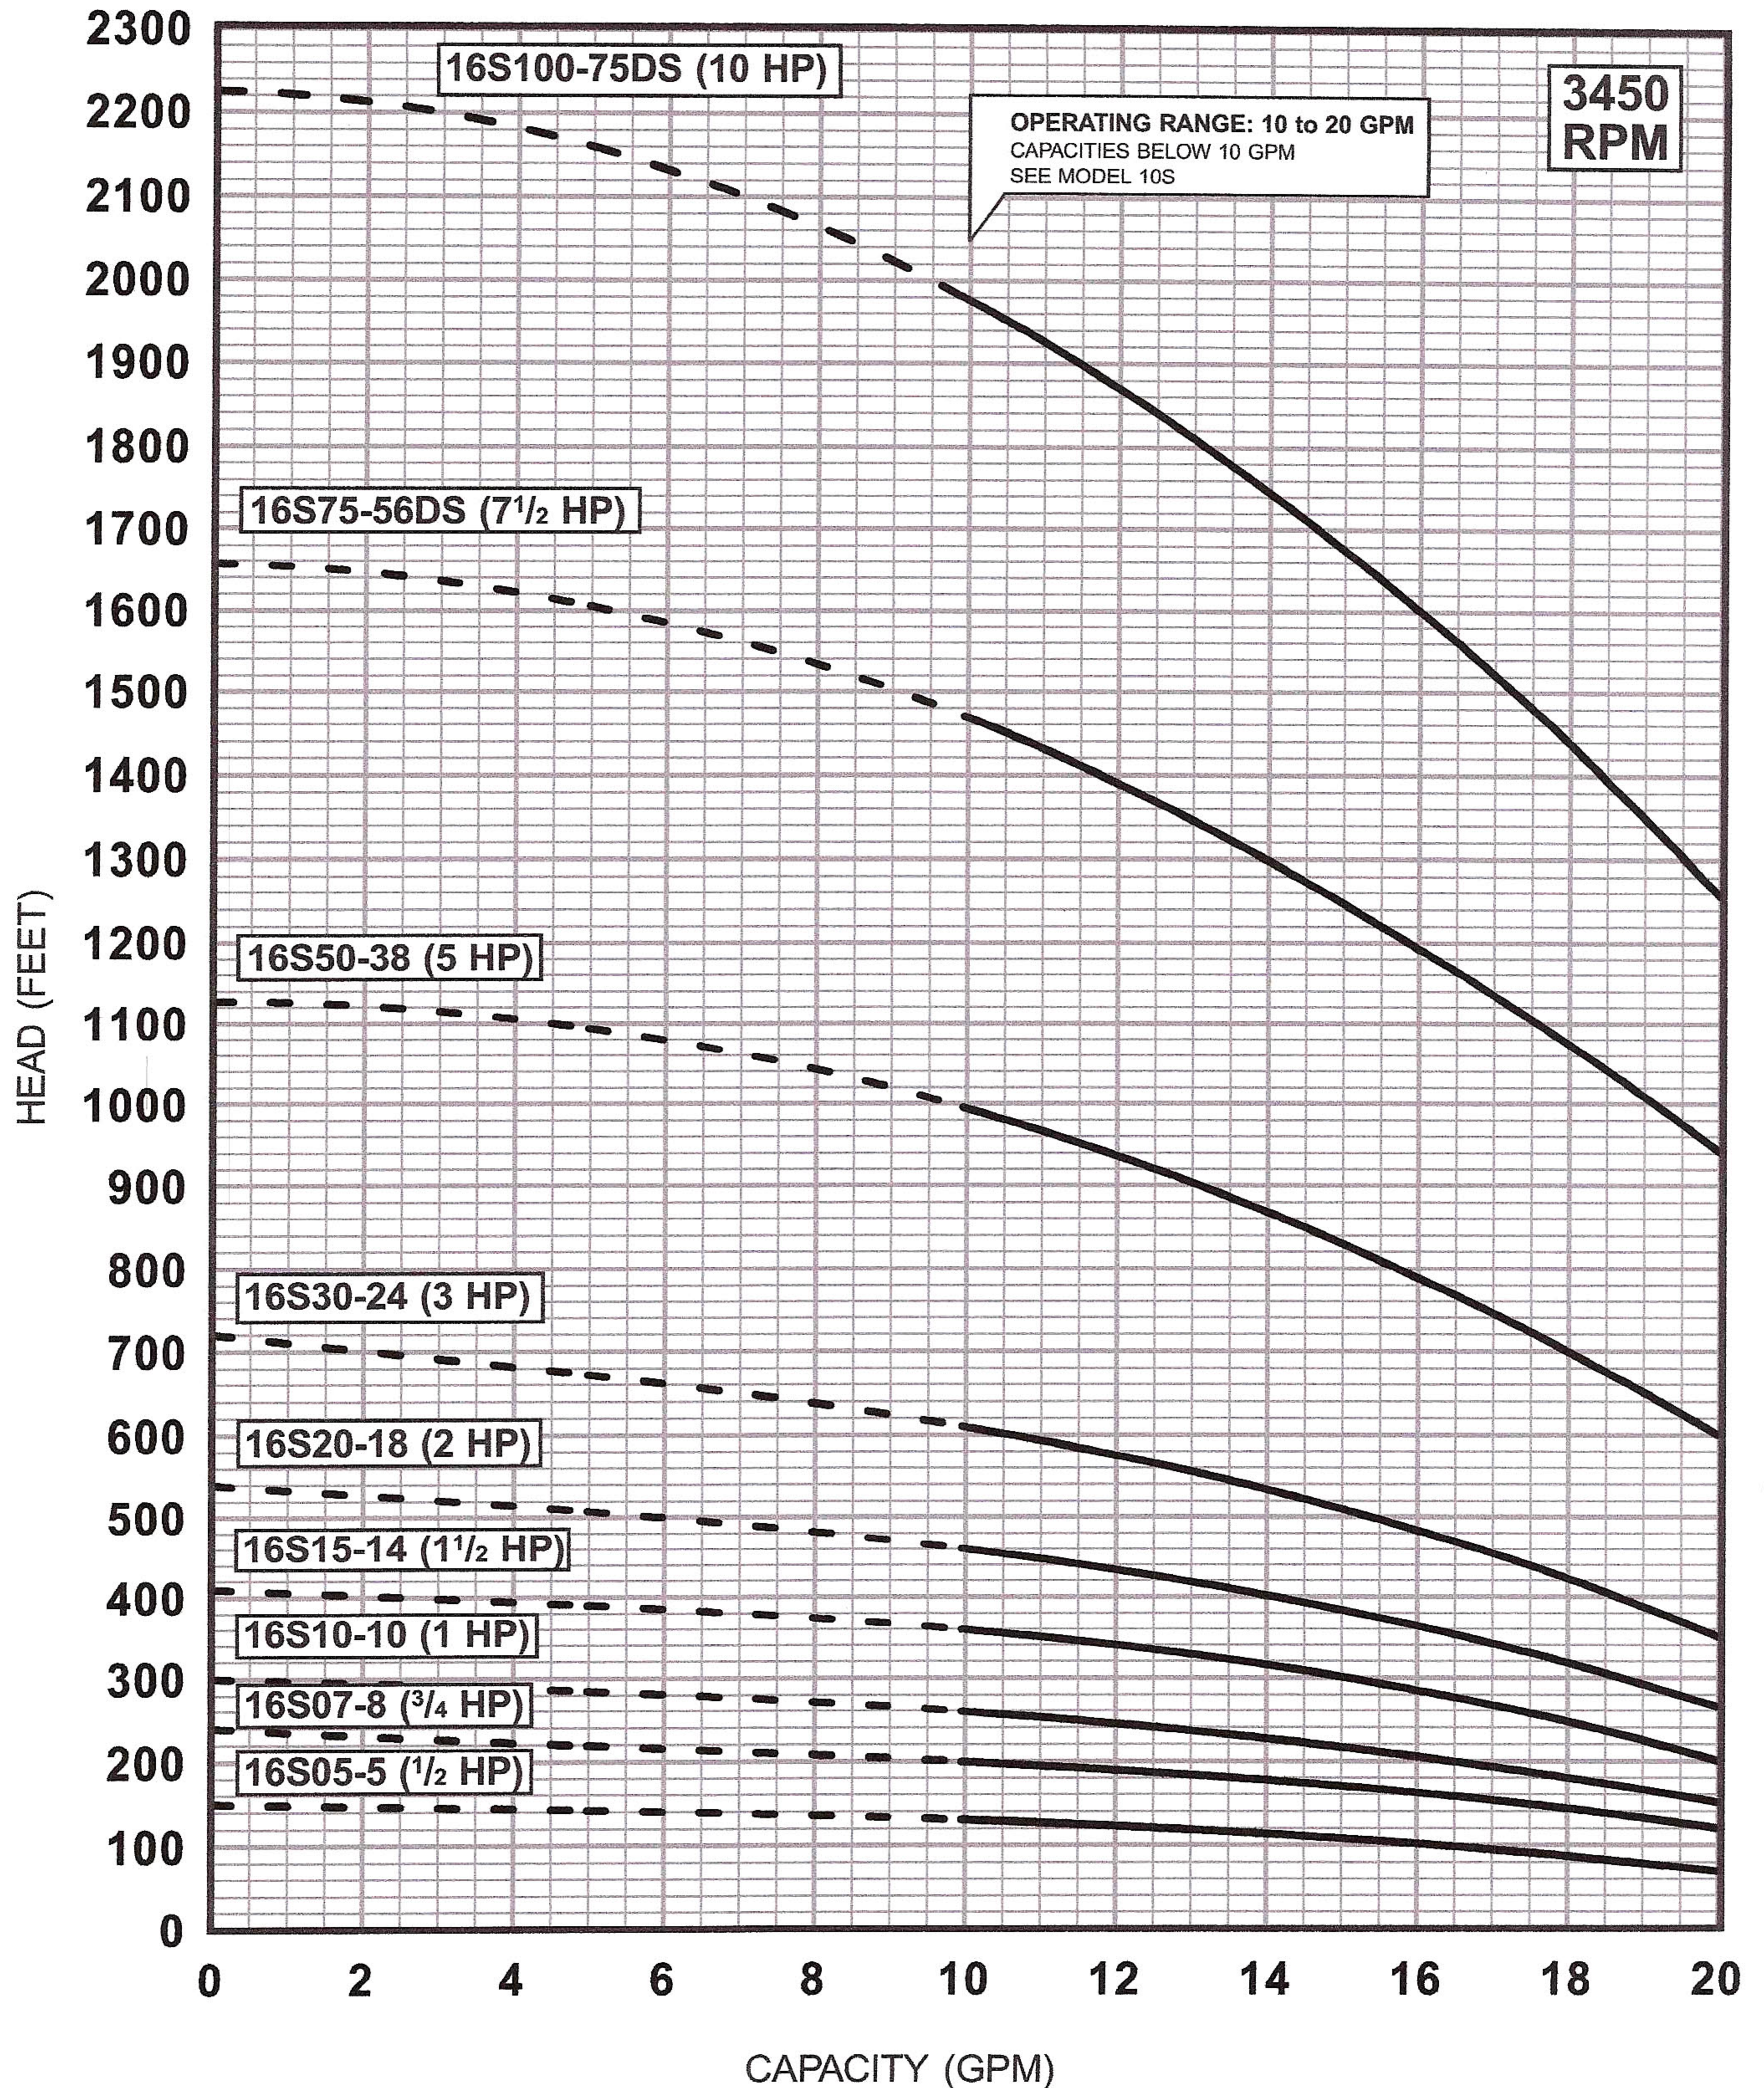

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
4" MOTOR STANDARD, .5 -5 HP/3450 RPM.
6" MOTOR STANDARD, 7.5 -10HP/3450 RPM.

Performance conforms to ISO 9906. 1999 (E) Annex A
Minimum submergence is 2 feet.