


FLOW RANGE: 24 - 55 GPM

OUTLET SIZE: 2 " NPT

NOMINAL DIA. 4"

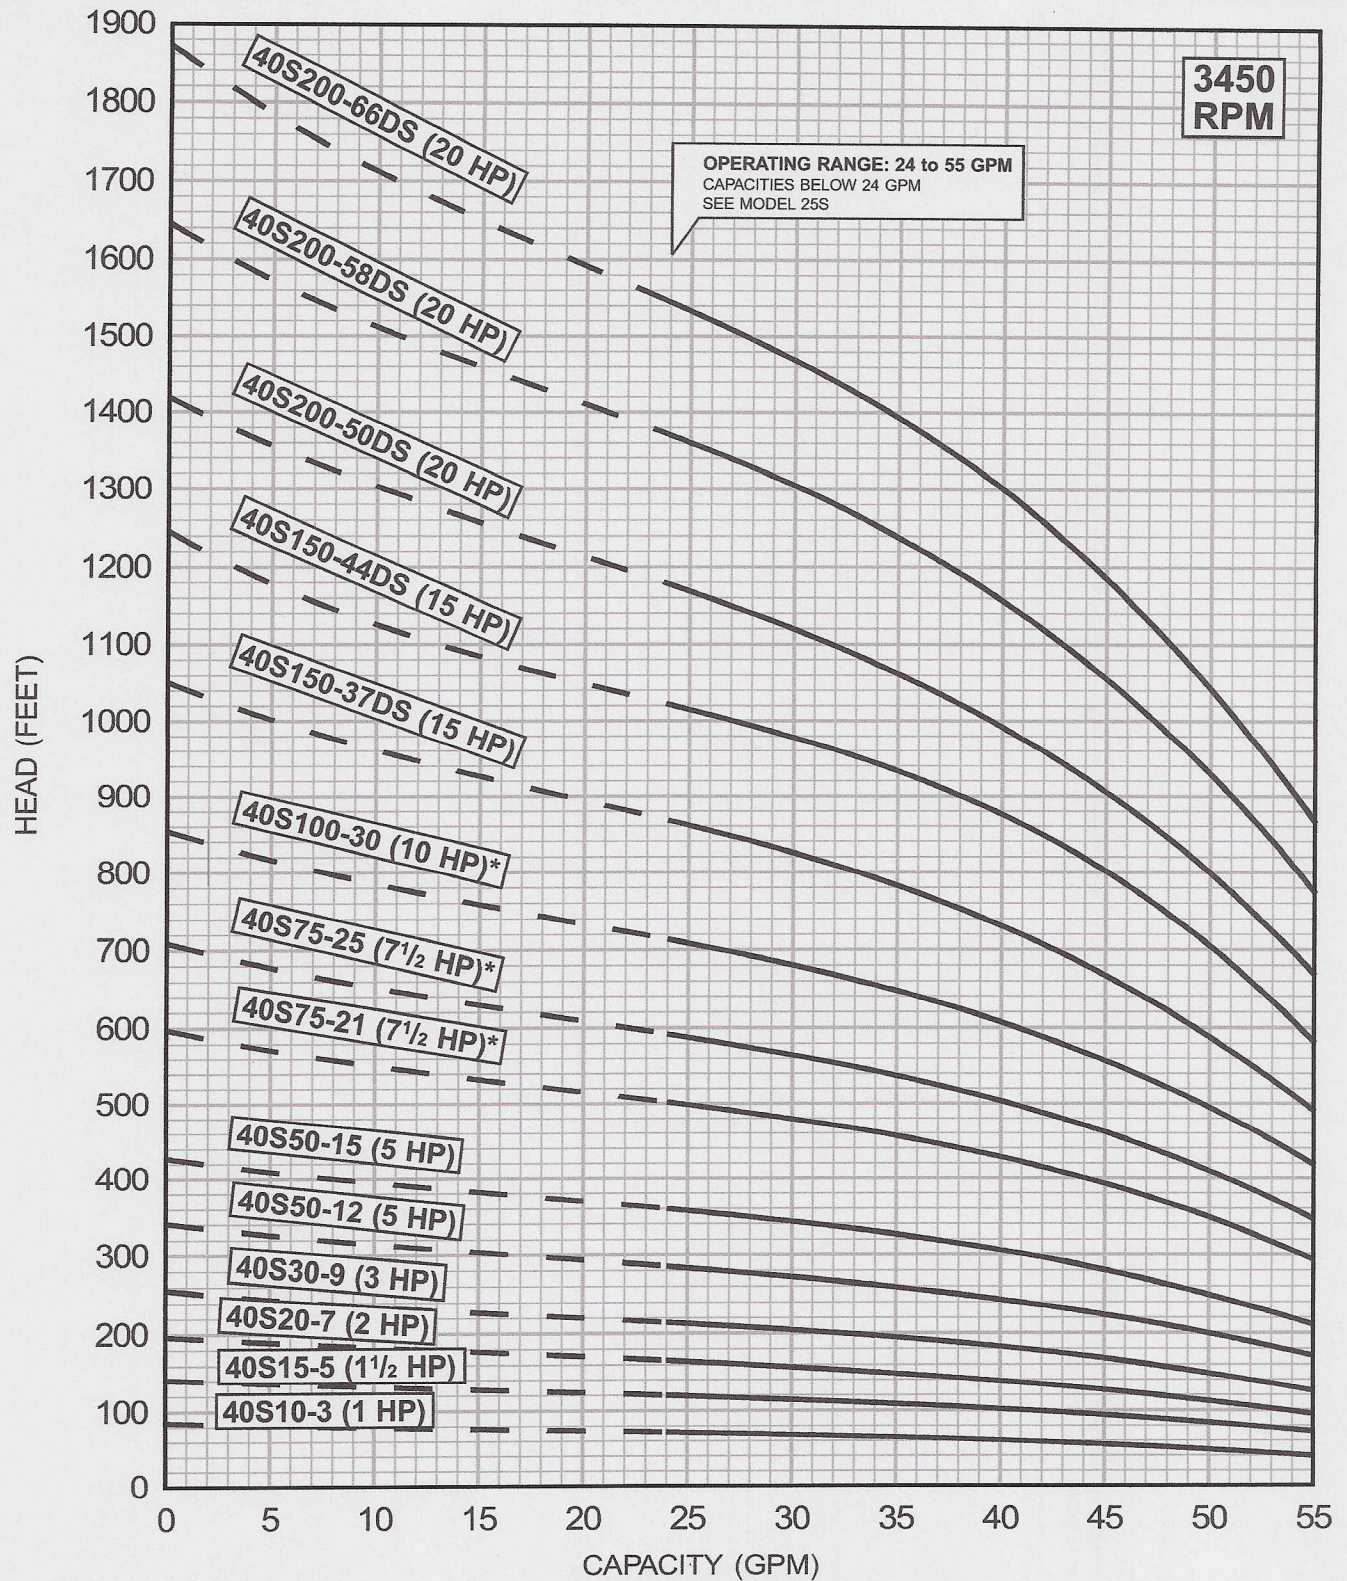

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
 4" MOTOR STANDARD, 1-10 HP/3450 RPM.
 6" MOTOR STANDARD, 15-20 HP/3450 RPM.
 * Also available with 6" motor.

Performance conforms to ISO 9906, 1999 (E) Annex A
 Minimum submergence is 5 feet.