


FLOW RANGE: 45 - 95 GPM

OUTLET SIZE: 2" NPT

NOMINAL DIA.: 4"

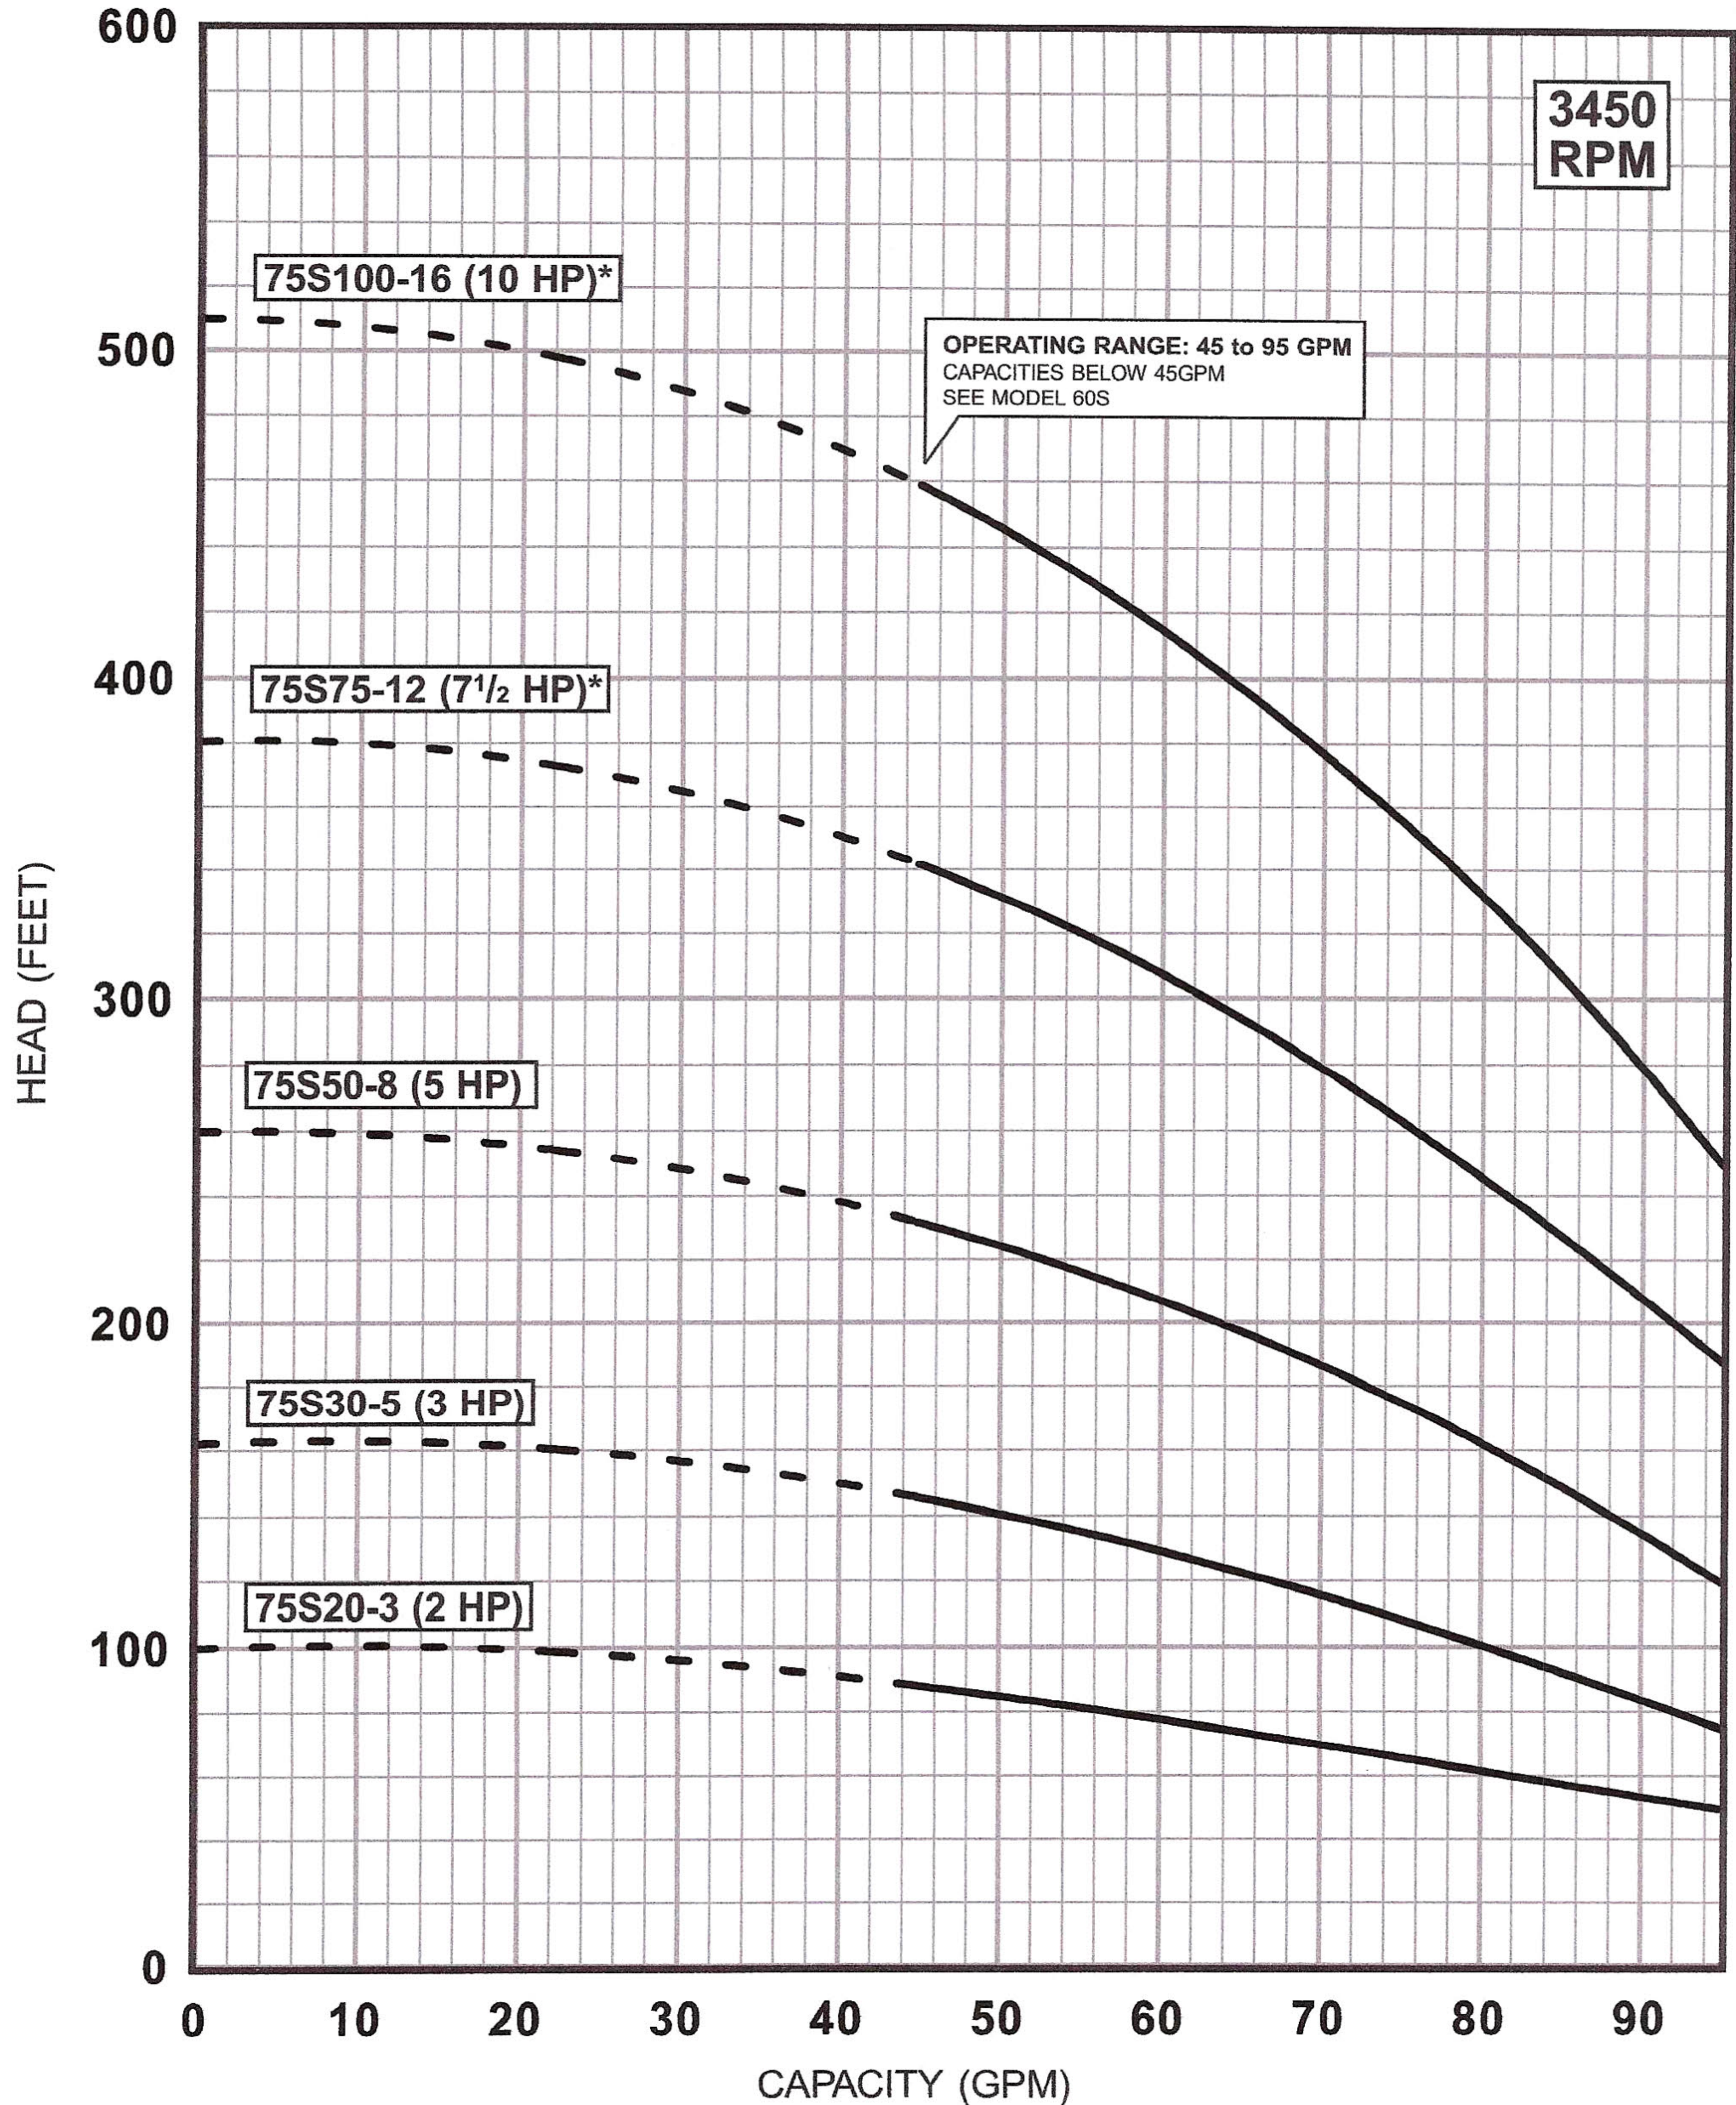

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

4" MOTOR STANDARD, 2-10 Hp 3450 RPM.

* Also available with 6" motor, performance is the same only at Best Efficiency point. Consult factory for actual performance.

Performance conforms to ISO 9906. 1999 (E) Annex A
Minimum submergence is 5 feet.